



## SALVA FRIO FC-SK



The fermentation camera FC-SK introduces the comfort and advantages of the retarded fermentation in the small bakeries that based its production on the use of racks.



### CHARACTERISTICS

- **Multipurpose**  
It is easy to install and has the ability to develop retarded or direct fermentation.
- **Optimum air distribution**  
Provided by the reflectors located in the posterior region of the cabinet, trying carefully to the most sensitive products.
- **Safety**  
Door with electromagnetic closure, managed from the control panel with manual safety opening in the outside and inside.
- **Compact and modern design**  
Frontal cooling  
This characteristic allows the placing of multiple machines next to each other without the need of leaving an space between them.
- **Control Panel FC-Touch**  
Equipped with the most advanced software can be adapted to the needs of the user.
- **Condensate collecting tray**  
Prevents the condensate of the inside of the door from falling to the floor.

## FC-SK DETAILS AND COMPOSITION

- Four capacities are possible:
  - 1 rack of 80 x 40 cm.
  - 1 rack of 80 x 46 cm.
  - 1 rack of 75 x 45 cm.
- R404 A fluid refrigerator.
  - Use of refrigerant which does not damage the ozone
- Working temperature
  - Between -2°C and 40°C to adapt to its different uses.
- Isolation
  - With a 60 mm thickness on the walls and 40 mm on the floor.

## GENERAL DIMENSIONS

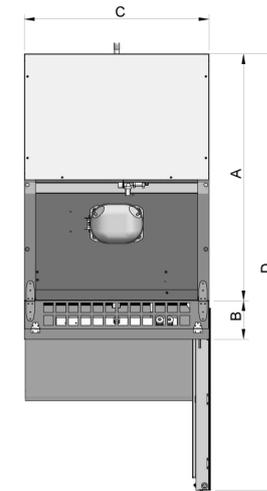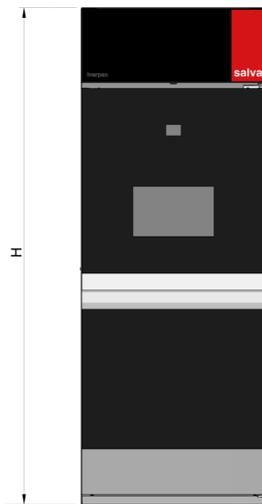

### Technical data FC-SK

kW	V	A	Hz
1.9 (I+N+T)	230	10.3	50
1.9 (I+N+T)	230	10.4	60


Cooling power/capacity: 2.017 kW or 2.021 kW  
(50 Hz or 60 Hz)

FC-SK	A	B	C	D	H	Weight
	1150 mm	180 mm	740 mm	2035 mm	2315 mm	390 kg

## INSTALLATIONS IN DETAIL

- Water supply
  - Network with maximum pressure intake between 1-1,5 kg/cm<sup>2</sup>. It is necessary to set manual key between the connection of the IVERPAN and the general water supply (rubber tube provided by SALVA).
- Drainage
  - The drain connection from the IVERPAN to the premises is done by 20 mm diameter rubber tube.
- Electric power supply
  - The electrical connection should be performed by authorized professionals, following the rules in force in each country.
- Facilities location (mm)

	X	Y	Z
Water supply (1)	363	608	2133
Drainage (2)	370	0	1986
Electrical supply (3)	128	1238	2232

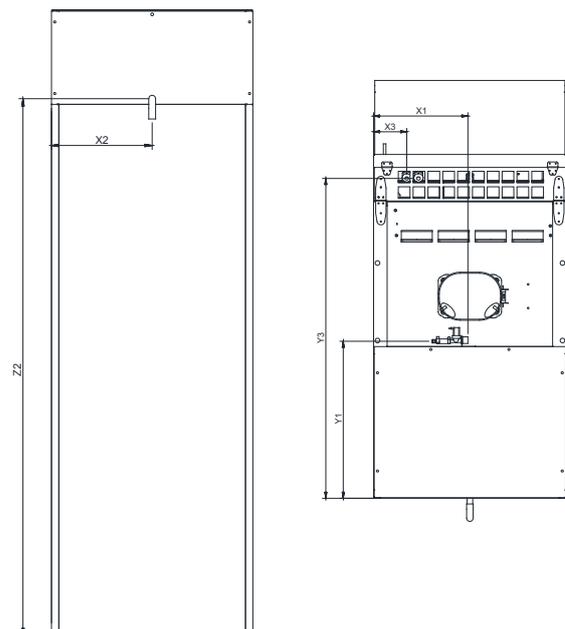

Technical sheet\_FC-SK\_(english)271017