

# VX-231 TUNNEL BASKET WASHER



## TECHNICAL SPECIFICATIONS

Conveyor speed	1.5 - 2.0 mtr/min
Power supply	415V,3Ø+N 50Hz
Wash pump	2.18kW
Booster heater	15kW
Wash tank heater	12kW
Total power	31.8kW
Total current	3 x 44.8 Amp
Wash tank capacity	110ltrs
Booster heater capacity	2x10 ltrs
Rinse water consumption (per hour)	280 ltrs
Min/max water pressure *1	200/600kPa
Min/max water temp *2	55/70°C
Max crate (WxH)	510x500mm
Useful height	500mm
Weight (empty)	297kg
Weight (shipping)	380kg
Dimension (shipping)	232L x 92W x 210Hcm
Water connection	3/4" hose
Drain diameter	Ø50mm

## STANDARD FEATURES


- Double skinned construction, in AISI 304
- Deep formed wash tank and boiler in AISI 316
- Stainless steel scrap screens & pump filters
- Removable stainless steel wash & rinse arms
- User friendly electronic controls
- Rinse water saver
- Back-flow prevention valve



The VX-231 is suitable for the general food-industry, who needs to wash and sanitize a large number of crates each day.

Versatility is one of the most prominent advantages of the VX-231 combined with easy operations and absolute cleanness, according to the strictest hygiene requirements.

## TECHNICAL DRAWING

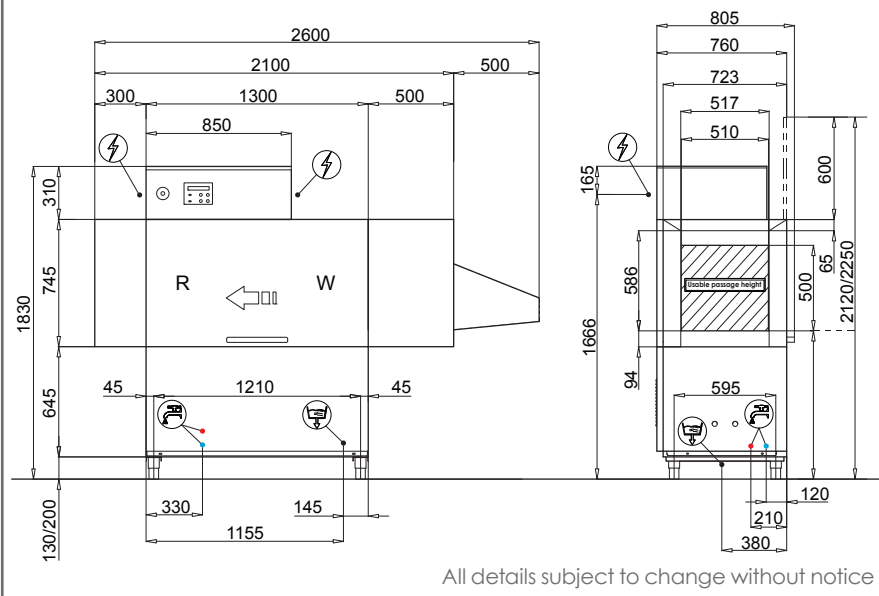

All details subject to change without notice

\*1 Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 600kPa

\*2 Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.

Call Rhima Australia  
today on **1300 347 944**

