



SALVA FRIO FLC-20



The range of retarded proofers SALVA IVERPAN, for trays, is recognized as an indispensable equipment in bakeries and bake offs around the world.

CHARACTERISTICS

- **Multipurpose**
It is easy to install and has the ability to develop retarded or direct fermentation.
- **Optimum air distribution**
Provided by the reflectors located in the posterior region of the cabinet, trying carefully to the most sensitive products.
- **Safety**
Door with electromagnetic closure, managed from the control panel with manual safety opening in the outside and inside.
- **Compact and modern design**
Frontal cooling
This characteristic allows the placing of multiple machines next to each other without the need of leaving an space between them.
- **Control Panel FC-Touch**
Equipped with the most advanced software can be adapted to the needs of the user.
- **Condensate collecting tray**
Prevents the condensate of the inside of the door from falling to the floor.

FCL-20 DETAILS AND COMPOSITION


- **Capacity**
20 trays of 80 x 40 or 80 x 46 cm.
- **R134 A fluid refrigerator.**
This refrigerant does not damage the ozone layer.
- **Working temperature**
Between -2°C and 40°C to adapt to its different uses.
- **Insulation**
With a 60 mm thickness on the walls and 40 mm on the floor.

Technical data FCL-20 ■

kW	V	A	Hz
1.8 (I+N+T)	230	9	50
1.8 (I+N+T)	230	9.5	60

Cooling power/capacity: 1.476 kW or 1.593 kW ■
(50 Hz or 60 Hz)


GENERAL DIMENSIONS

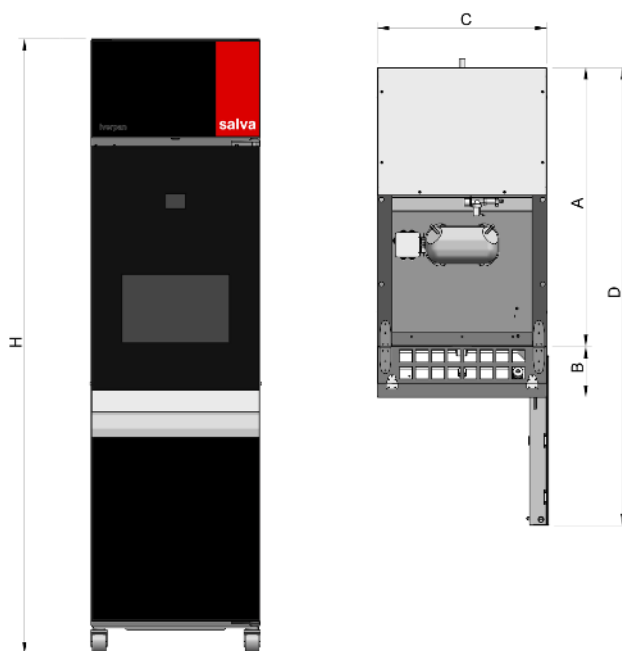

FCL-20	A	B	C	D	H	Weight
	987 mm	180 mm	600 mm	1620 mm	2187 mm	309 kg

INSTALLATIONS IN DETAIL

- **Water supply**
Network with maximum pressure intake between 1-1,5 kg/cm². It is necessary to set manual key between the connection of the IVERPAN and the general water supply (rubber tube provided by SALVA).
- **Drainage**
The drain connection from the IVERPAN to the premises is done by 20 mm diameter rubber tube.
- **Electric power supply**
The electrical connection should be performed by authorized professionals, following the rules in force in each country.

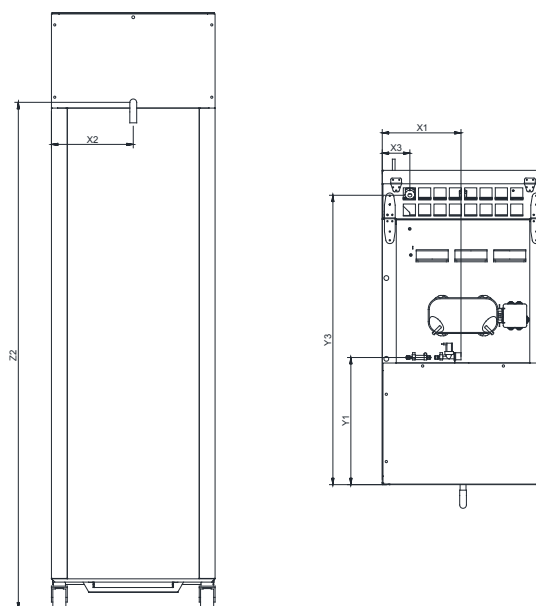

Location (mm)	X	Y	Z
Water supply (1)	293	472	2073
Drainage (2)	300	0	1857
Electric supply (3)	103	1074	2170

Technical sheet_FCL-20_(english)271017