

# SPH515AU

Family	Dishwasher
Subfamily	Hoodtype dishwasher
Basket dimensions	500x500 mm
Panel	Easyline 2016
Filter	5-stages filter system
Rinse pump H.T.R. system	Rinse pump with atmospheric boiler
Usable load height	470 mm
Power connection	400 V 3N~ / 16 A / 9,7 kW / 50 Hz
Maximum height with open hood	2132 mm
Product dimensions WxDxH	634x750x1518 mm



## Distribution

Solutions	Bars/Cafes; Hotels; Restaurants/Catering; Butcher's shops; Schools; QSR
-----------	--

## Aesthetics

Serie	Easyline	Led color	White
Control panel	Electronic		

## Functions



Functionality	GN 1/1 trays washing; 5-stage filter; SHR+; HTR; Door clearance 470mm
---------------	---

## Programs

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 85°C/Tank 60°C-60"; Boiler 71°C/Tank 60°C-1'20"; Boiler 85°C/Tank 60°C-1'30"; Boiler 71°C/Tank 60°C-2'10"; Boiler 85°C/Tank 60°C-2'40"; Boiler 85°C/Tank 60°C-4'10"
Drain and self cleaning cycle	Yes

Maximum basket/hour	40
Maximum dishes/hour	1080

## Interface

Display	4 digit	Cycle progress alert	Yes
Number of buttons	5	Manual diagnostic	Yes
On/Off button	Yes		

## Construction

Tank	Deep drawn	Tank capacity	14 l
Construction	Double wall	Boiler capacity	10 l
Tank material	Stainless steel AISI 304	Rumorosità	Lpa 59,9 dBA
Back panel	Prepainted	Protection class	IPX4
Tank filter	Stainless steel	Adjustable feet	Yes
Washing spray arm	Stainless steel	Net weight	122,000 kg
Rinse spray arm	Stainless steel	Drain max. height	1000 mm
Hood	Double wall		

## Technical Features

Tank heating element	2200 W	Water inlet	8°C
Boiler heating element	9000 W	Max temperature inlet water	60°C
Washing pump	700 W	Max water hardness	12°F - 7°dH
Default connection	9700 W	Water inlet	100-1000 kPa
Water cycle consumption	2,7 l		

## Electrical Connection

Electrical connection option	230 V~ / 16 A / 3,7 kW / 50 Hz; 230 V~ / 16 A / 3,7 kW / 50 Hz (NC); 230 V~ / 26 A / 9,7 kW / 50 Hz (NC); 230 V~ / 26 A / 9,7 kW / 50 Hz; 230 V~ / 30 A / 6,7 kW / 50 Hz (NC); 230 V~ / 30 A / 6,7 kW / 50 Hz; 400 V 3N~ / 16 A / 9,7 kW / 50 Hz (NC)
------------------------------	---


## Equipments

Drain pump	Yes	Rinse load	Yes, manual
Peristaltic detergent doser	Yes, electronic control	Cycle counter	Yes
Peristaltic rinse-aid doser	Yes, electronic control	Break tank	Yes

<b>Default chemicals dosing unit of measure</b>	gr/lt	<b>Partial renewal of water in the tank and built-in drain pump</b>	Si
<b>Boiler thermostop</b>	Yes default ON	<b>Trays washing option GN1/1 530x325mm</b>	Yes
<b>Soft Start</b>	Yes	<b>Water supply pipe diameter</b>	16 mm
<b>Stand-by system</b>	Yes	<b>Drain supply pipe diameter</b>	21,5 mm
<b>Automatic start</b>	Yes, default OFF	<b>Peristaltic detergent doser</b>	Yes, manual
<b>Detergent load</b>	Yes, manual	<b>Peristaltic detergent doser</b>	Yes, manual

## Accessories Included

<b>Dish basket</b>	PB50D01	<b>Water supply pipe</b>	In acciaio Watermark
<b>Cutlery basket</b>	PHOOS02	<b>Drain pipe</b>	Yes - 2m
<b>Flat basket</b>	1x PB50G02		

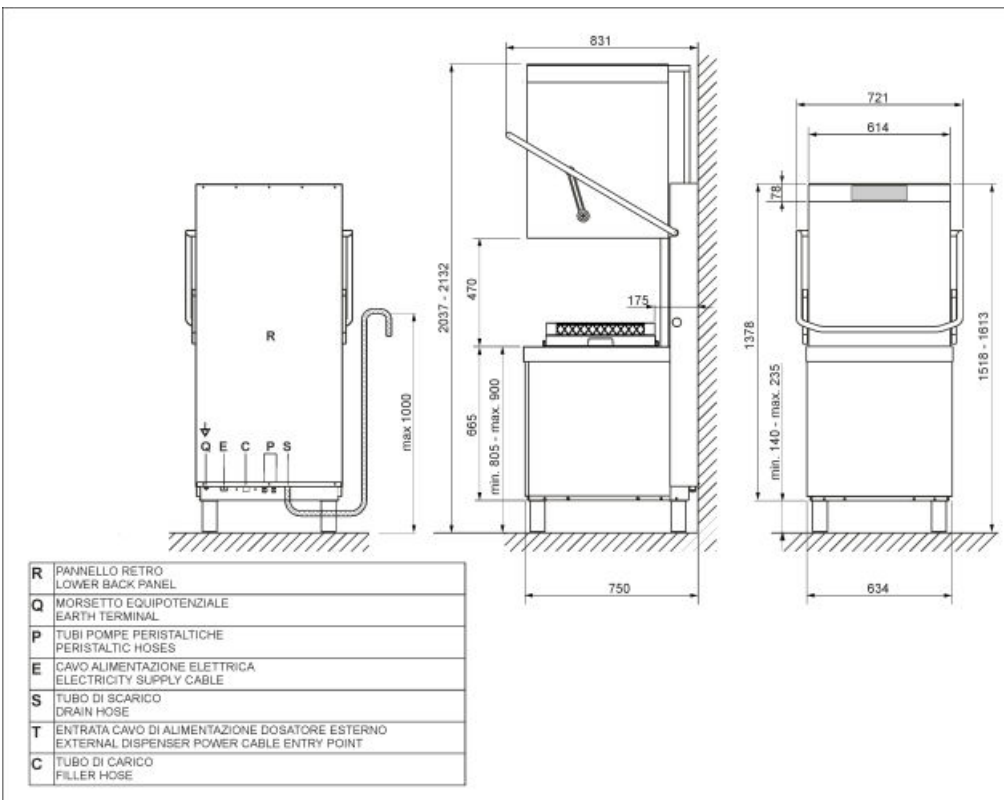

## Not included accessories



**WT5700SR**

Entry table right side 700mm



**WTX51200**

Exit table both sides 1200mm



**WT51200SR**

Entry table right side 1200mm



**PHOOS03**

Basket in polypropylene with 6 compartments for cutlery for Capote



**KITSONLIV**

Probe level kit



**WT5700SL**

Entry table left side 700mm



**PHOGR5**

Glass basket for 500x500 mm glasswashers



**WT51200SHL**

Entry table left side 1200mm



**WH00S01**

Wire insert for 12 small dishes



**PHOOS01**

Single basket in polypropylene for cutlery



**WTX5700R**

Exit table right side 700mm



**PB50G02**

Universal basket in polypropylene 500x500



**WB50T02**

Wire basket for 5 trays 600x500



**WTX51200L**

Exit table left side 1200mm



**WT51200SHR**

Entry table right side 1200mm



**WB50G01**

Universal wire basket with flat bottom 500x500



**WT51200SL**

Entry table left side 1200mm



**PB50D01**

Basket made of polypropylene for 18 plates 500x500



**WB50G02**

Wire basket for glasses with inclined bottom 500x500



**WTX51200R**

Exit table right side 1200mm



**WB50G04**

Wire basket for glasses with inclined bottom 500x500



**WTX5700**

Exit table both sides 700mm



**PHOOS02**

Basket in polypropylene for cutlery with 6 compartments



**WB50D01**

Wire basket for 18 dishes and trays 500x500



**WB50G03**

Wire basket for glasses with inclined bottom 500x500



**WTX5700L**

Exit table left side 700mm

## Symbols glossary (TT)

---



...



...



...



MAX. USABLE HEIGHT 470mm



5 STAGE FILTER